


## YIRA

188-2020000129550


YIRA PD SUSPENSION made of aluminium, white, similar to RAL 9003, beam 45°, light output direct, with converter, max. 600mA, dimmability: not dimmable, cable white, adapter/ceiling base white, pendant length 2000mm, IP20



## DRAWING

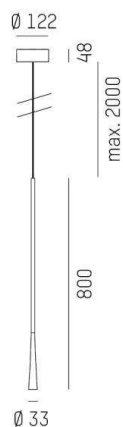

## LIGHT DISTRIBUTION CURVE

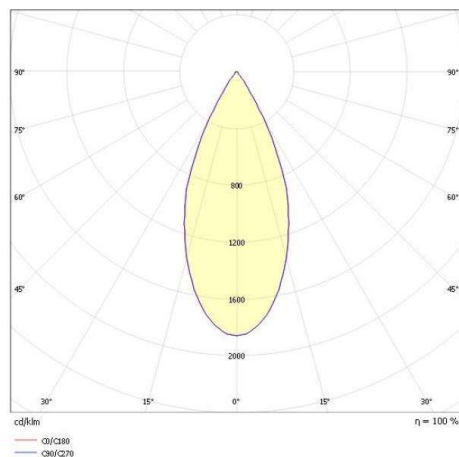

## TECHNICAL DETAILS

System perform. [W]	6
Bulb type	LED
Luminous flux [lm]	380
Current sec. [mA]	600
Colour temp. [K]	3000K
CRI	>90
Converter	with converter
Dimming	not dimmable
Light output	direct
Beam angle [°]	45°
Voltage [V]	220-240V 50/60Hz
Material	aluminium
Length [mm]	600
Pendant length [mm]	2000
Diameter [mm]	33
IP protection class	IP20
Voltage class	protection cl. I
Net weight [kg]	0,60
Colour lamp	white
RAL	9003
Colour adapter/ceiling base	white
Electric wire	white
EAN-Number	9010506763812
Lifetime [h]	L80 B10 20 000
Energy efficiency cl.	E



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.