


TRIGGA

662-017020529690


TRIGGA LOON MINI PD SUSPENSION made of aluminium, black, similar to RAL 9005, anti-glare LFO lens due to microfaceted structure grey, beam 55°, light output direct, with converter, max. 350mA, dimmability: not dimmable, cable black, fabric, adapter/ceiling base black matt, pendant length 1500mm, IP20



DRAWING

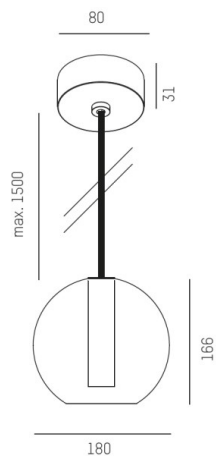

LIGHT DISTRIBUTION CURVE

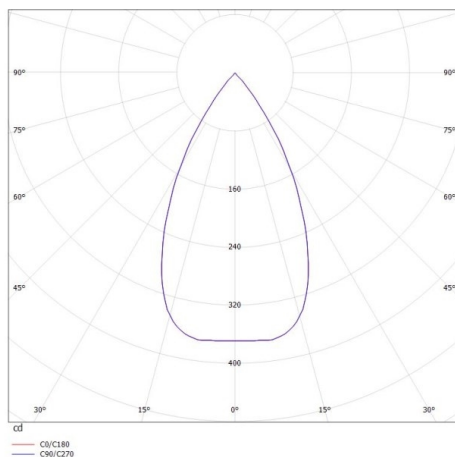

TECHNICAL DETAILS

System perform. [W]	6
Bulb type	LED
Luminous flux [lm]	290
Current sec. [mA]	350
Colour temp. [K]	3000K
CRI	>90
Optics	LFO lens
Designer	Serge Cornelissen
Converter	with converter
Dimming	not dimmable
Light output	direct
Beam angle [°]	55°
Voltage [V]	220-240V 50/60Hz
Material	aluminium
Length [mm]	243,5
Height [mm]	166
Pendant length [mm]	1500
Diameter [mm]	180
IP protection class	IP20
Voltage class	protection cl. I
Net weight [kg]	1,32
Colour lamp	black
RAL	9005
Colour of glass/shade	grey
Colour adapter/ceiling base	black matt
Electric wire	black, fabric
EAN-Number	9008905764868
Lifetime [h]	L80 B10 50 000
Energy efficiency cl.	6
No. of luminaires B16A	8



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.