


**KRAM**  
5017-STFP  
Design Thomas Pedersen

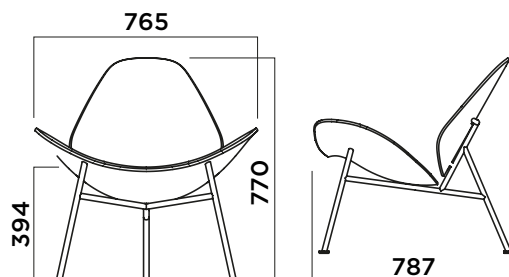

## FRAME

TELAIO  
BASTIDOR

Metal frame in round tube diameter 20 mm, thickness 2 mm, accordingly with UNI EN 10305-3 rule in Asform. Painted frame with epoxy-polyester powder with average thickness of 50  $\mu$ . Chromed frame with average thickness of 5  $\mu$ .

Telaio in metallo con tubo tondo di diametro 20 mm, spessore 2 mm, in conformità della norma UNI EN 10305-3 in Asform. Telaio verniciato con polveri epossipoliesteri con spessore medio 50  $\mu$ . Telaio cromato con spessore medio di 5  $\mu$ .

Bastidor metálico de tubo redondo de 20 mm de diámetro y 2 mm de espesor, conforme a la norma UNI EN 10305-3 en Asform. Bastidor con recubrimiento en polvo epxi-poliéster con 50  $\mu$  de espesor medio. Bastidor cromado con 5  $\mu$  de espesor medio.



**30**      **31**      **01**      **14**

## SEAT AND BACKREST

SEDUTA E SCHIENALE  
SEAT AND BACKREST

Plywood oak 11,5 mm thickness.

Plywood oak 11,5 mm thickness.

Plywood oak 11,5 mm thickness.



**RVVAN**      **RVTA04**

Plywood stratus superior american walnut 11,5 mm thickness.

Plywood stratus superior american walnut 11,5 mm thickness.

Plywood stratus superior american walnut 11,5 mm thickness.



**V004**

## PKG


IMBALLO  
EMBALAJE

Pkg	A(cm)	B(cm)	h(cm)	MC	PCS	Weight (kg)
	86	83	78	0.56	1	14.4

## KRAM upholstered seat and back panel

5017-STFT

Design Thomas Pedersen

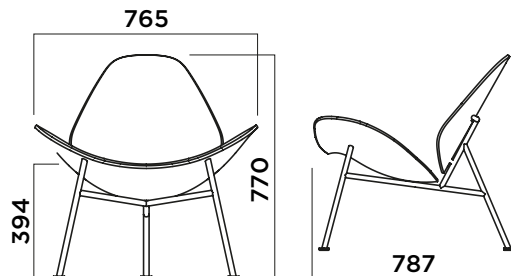

### FRAME

TELAIO  
BASTIDOR

Metal frame in round tube diameter 20 mm, thickness 2 mm, accordingly with UNI EN 10305-3 rule in Asform. Painted frame with epoxy-polyester powder with average thickness of 50 μ. Chromed frame with average thickness of 5 μ.

Telaio in metallo con tubo tondo di diametro 20 mm, spessore 2 mm, in conformità della norma UNI EN 10305-3 in Asform. Telaio verniciato con polveri epossipoliesteri con spessore medio 50 μ. Telaio cromato con spessore medio di 5 μ.

Bastidor metálico de tubo redondo de 20 mm de diámetro y 2 mm de espesor, conforme a la norma UNI EN 10305-3 en Asform.

Bastidor con recubrimiento en polvo epxi-poliéster con 50 μ de espesor medio. Bastidor cromado con 5 μ de espesor medio.



Plywood oak 11,5 mm thickness.

Plywood oak 11,5 mm thickness.

Plywood oak 11,5 mm thickness.



Plywood stratus superior american walnut 11,5 mm thickness.

Plywood stratus superior american walnut 11,5 mm thickness.

Plywood stratus superior american walnut 11,5 mm thickness.



### UPHOLSTERY

TAPPEZZERIA  
UPHOLSTERY

Wood seat and back panel in plywood beech, 5,5 mm thickness, upholstered.

Polyurethane foam thickness 1,5 cm and density 40 kg/m3 upholstered.

Pannello seduta e schienale in legno di faggio multistrato, spessore 5,5 mm, tappezzato.

Wood seat and back panel in plywood beech, 5,5 mm thickness, upholstered.

Polyurethane foam thickness 1,5 cm and density 40 kg/m3 upholstered.

- C Velvety, Nuvole
- E Volta Celeste
- F Steelcut Quartet
- G Harald
- H Full Leather, Safire

COM Fabric(m)	COM Leather(m2)
2,50	2,50

### CERTIFICATIONS

CERTIFICAZIONI  
CERTIFICADOS



**PKG**  
IMBALLO  
EMBALAJE

Pkg	A(cm)	B(cm)	h(cm)	MC	PCS	Weight (kg)
	86	83	78	0.56	1	14.4